NEW SERIES - IS 600 BB

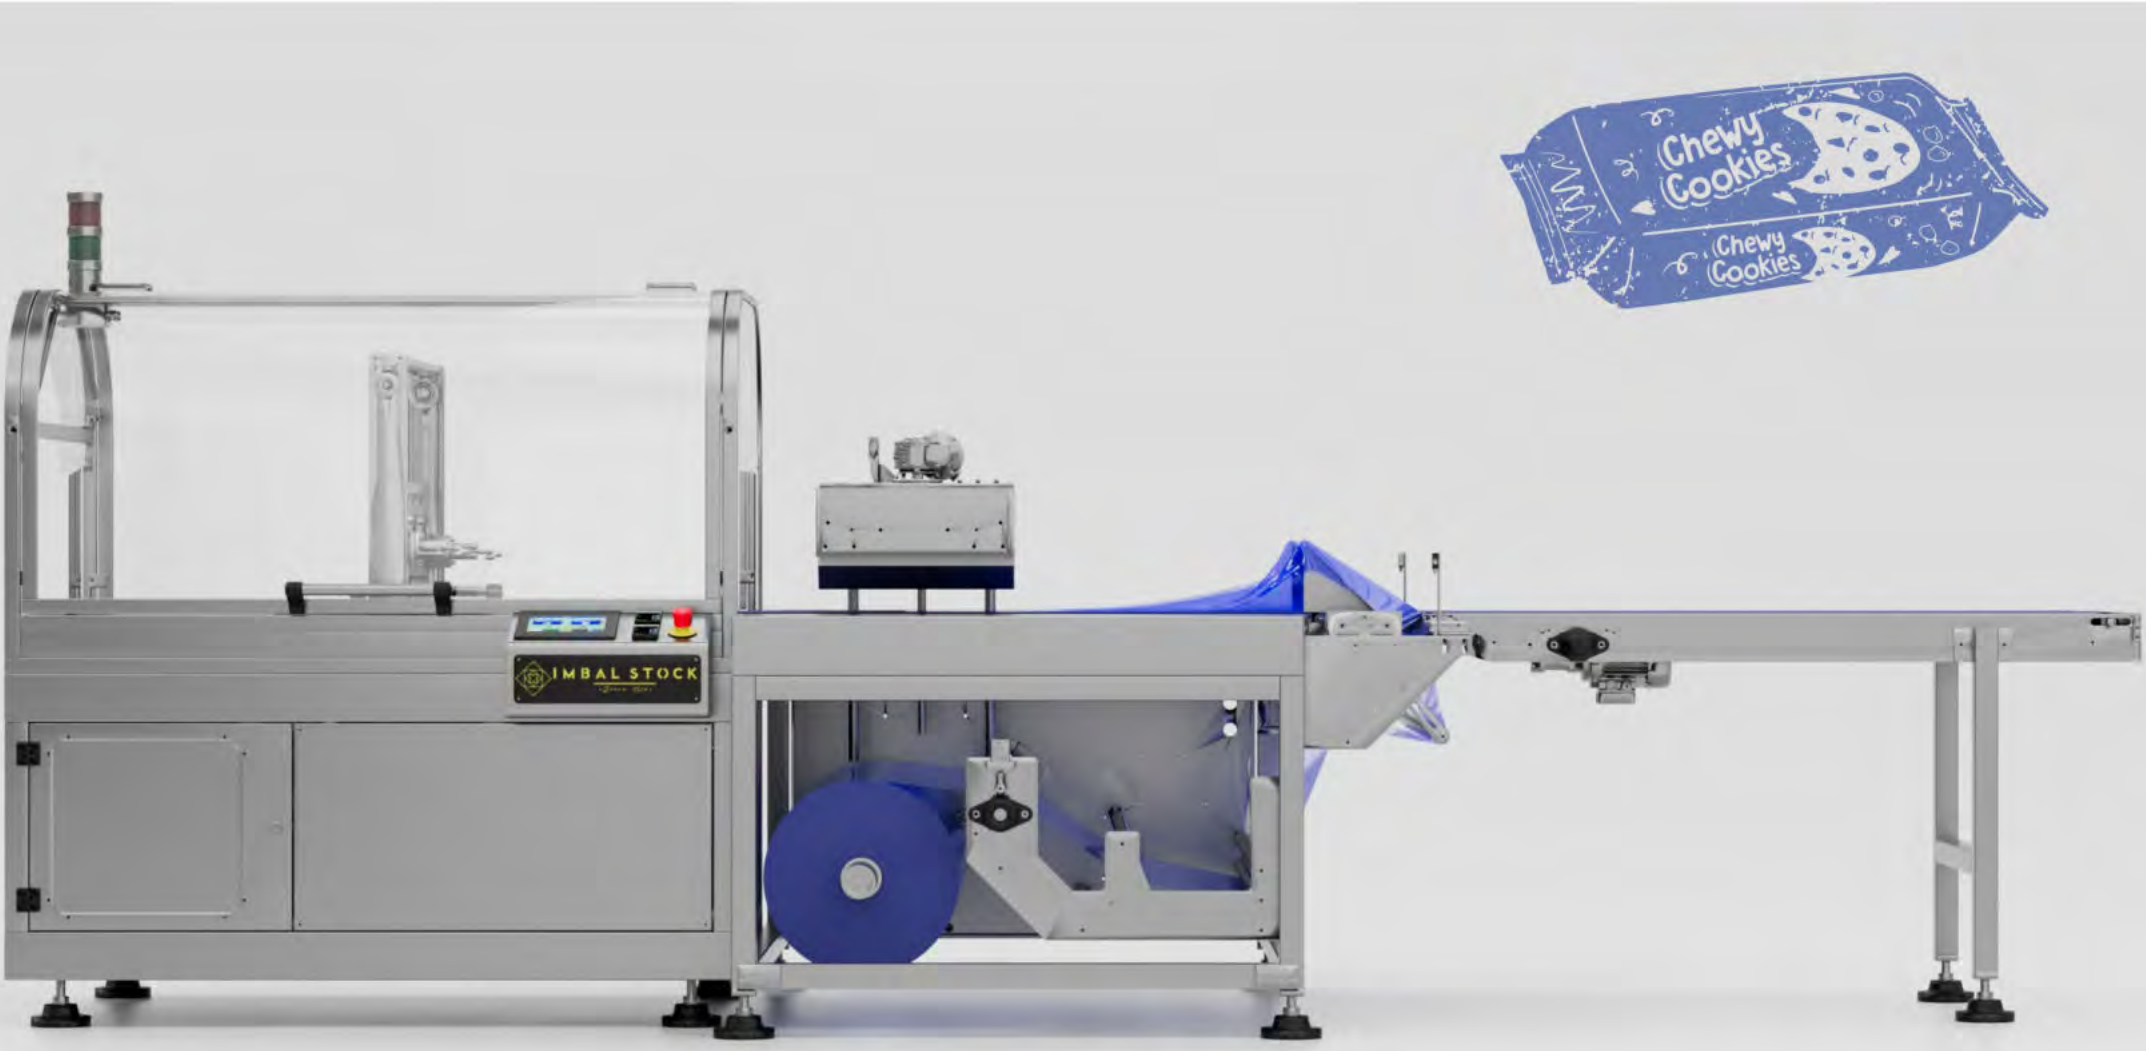

MY PARTNER - SOLUTIONS FOR EVERY APPLICATION

Transform IMBAL STOCK® flow wrapping machines into multifunctional tools to reduce costs and increase packaging efficiency. The IS 600 BB series offers a wide range of solutions to help companies improve the wrapping of solid and irregularly shaped products. You can rely on the welding systems for "PP polyolefin" and "PE polyethylene" films, as well as eco-sustainable
films. Versatile and robust, it packages large-sized products.

Trasformate le confezionatrici flow wrapper IMBAL STOCK® in strumenti multifunzione per ridurre i costi e aumentare l'efficienza di confezionamento. La serie IS 600 BB offre una vasta gamma di soluzioni per aiutare le aziende a migliorare l'imbustamento di prodotti solidi e di forma irregolare. Si può fare affidamento sui sistemi di saldatura per pellicole in "PP poliolefina" e "PE polietilene" e pellicole ecosostenibili. Versatile e robusta, imballa prodotti di grandi dimensioni.

Transforme las máquinas de envasado flow wrapper IMBAL STOCK® en herramientas multifuncionales para reducir costos y aumentar la eficiencia del empaquetado. La serie IS 600 BB ofrece una amplia gama de soluciones para ayudar a las empresas a mejorar el embolsado de productos sólidos y de forma irregular. Puede confiar en los sistemas de soldadura para películas de "PP poliolefina" y "PE polietileno", así como en películas eco-sostenibles. Versátil y robusta, embala productos de gran tamaño

IS / Flow Wrapper Series

INDUSTRY 4.0

IF 54 - PRODUCTION SPEED

From 20 up to 85 / Da 20 a 85 conf/min Desde 20 hasta 85 paq/min

Product Dimensions:
Width: 20÷500 mm
Height: 1÷250 mm
Length: Variable

Dimensioni Prodotto:
Larghezza: da 20 a 500 mm
Altezza: da 1 a 250 mm
Lunghezza: Variabile

Dimensiones de Producto:
Anchos: de 20 a 500 mm
Alturas: de 1 a 250 mm
Longitudes: Variable

Packaging Materials:

Heat-sealable
Coated
Cold-sealable
Polyethylene
Paper
Recyclable Films - ***Bio*** Films

Reel Dimensions:
Reel width max 750 mm
Outside diameter: 650 mm
Core diameter: 68÷80 mm

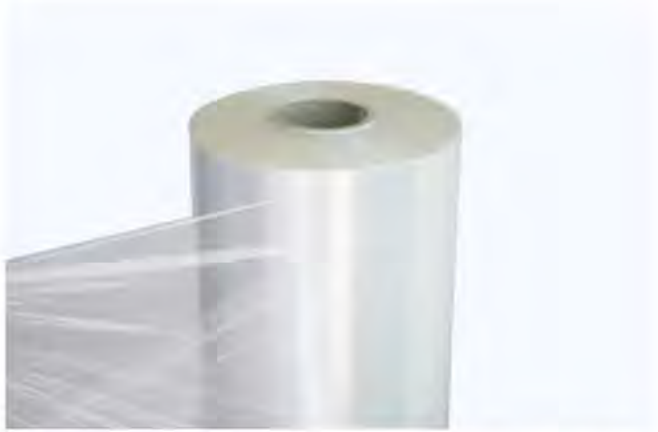

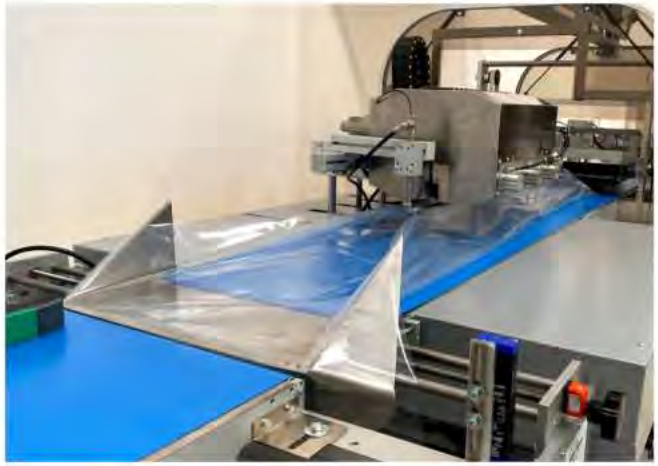

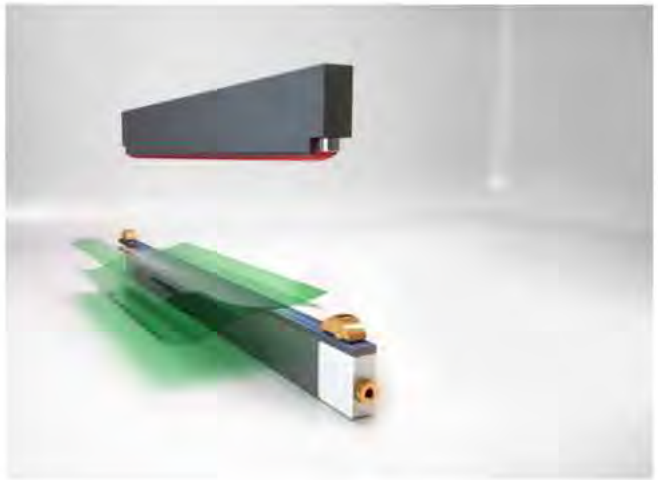

Machine Dimensions:
Length: 2600 mm
Width: 1300 mm
Height: 1538mm
Machine weight: 1.100 kg

Dimensioni macchina:
Lunghezza: 2600 mm
Larghezza: 1300 mm
Altezza: 1538 mm
Peso: 1.100 kg

Dimensiones de máquina:
Longitud: 2600 mm
Ancho: 1300 mm
Altura: 1538 mm
Peso: 1.100 kilos

OPTIONAL

Printing unit for expiry date
Photo electric cell for print register
Casters under the machine
Gear shift for short/long pitch
Double reel holder
Polythene version
Infeed extension
Zig-zag knives
Euroslot punch
No product no bag
Automatic feeding
Many other solutions can be proposed by our technical team according to the various requirements

OPTIONAL

Stampatore data scadenza
Fotocellula stampa centrata
Ruote sotto la macchina
Cambio passo corto/lungo
Doppio portabobina
Versione politene
Allungamento nastro
Coltelli a zig-zag
Punzone euroslot (sombrero)
No product no bag
Alimentazione automatica
Molte altre soluzioni vengono proposte dal ns. staff tecnico in ordine alle singole esigenze

OPCIONALES

Marcador, codificador para fecha de caducidad y Nº lote
Fotocélula para trabajar con film impreso
Ruedas para poder movilizar la máquina
Cambio de paso, corto - largo
Doble porta bobina
Versión polietileno
Prolongación cinta de carga
Cuchilla de corte a zig-zag.
Euroslot (para colgar el paquete)
No product - no bag
Alimentación automática
Otras soluciones que pueden comentar con nuestro personal especializado

ELECTRICALS FEATURES

Motion control with PLC Mitsubishi
Interface through 5,7” touch screen
Working programs memorization
Machine diagnostic
Temperature control through touch screen
Power 7 KW

CARATTERISTICHE ELETTRICHE

Controllo assi con PLC Mitsubishi
Interfaccia tramite touch screen da 5,7” Memorizzazione dati e ricette Diagnostica macchina
Controllo temperature da touch screen Potenza installata 7 KW

CARACTERÍSTICAS ELÉCTRICAS

Control mediante PLC Mitsubishi
Interfase con pantalla táctil de 5,7 pulgadas
Memorias para diferentes programas de
trabajo Diagnóstico del equipo
Control de la temperatura a través de la pantalla táctil
Potencia instalada: 7 Kw

PNEUMATIC FEATURES

Compressed air: 7 bar dry and filtered air

CARATTERISTICHE PNEUMATICHE

Alimentazione aria compressa: 7 bar aria secca e filtrata

CARACTERÍSTICAS NEUMÁTICAS

Alimentación con aire comprimid
Presión: 7 Bar / Aire seco y filtrado

MITSUBISHI ELECTRIC

VIDEOJET

WINNING CHOICES FOR ELECTRICAL, MECHANICAL AND PNEUMATIC COMPONENTS

TECHNICAL SUPPORT FOR ULTRASONIC WELDERS: WEBER ULTRASONIC
TECHNICAL SUPPORT FOR PRINT ON PAPER AND BIO FILM : VIDEOJET

WEBER ULTRASONICS

INTEGRATION WITH ROBOT

IMBAL STOCK

DELTA

Speed and Accuracy

SCARA

Robots Ultra Compact

COLLABORATIVE

Support in Production

WE CUSTOMIZE THE PACKAGING LINES FOR DIFFERENT PRODUCTS

PLASTIC SHUTTER CONVEYORS

Plastic shutter conveyors are machines used for the transport of products that have to be accumulated.
They can have adjustable width, they can be in anodized aluminium or in stainless steel structure. These conveyors are equipped with adjustable side rails and speed regulators.

STAINLESS STEEL CONVEYOR BELTS

The stainless steel conveyor belts are used mostly in the food industry or in places where there is presence of humidity. The belt for this conveyors is a FDA conformity belt, they also can have stainless steel side rails with the possibility to regulate the width, adjustable supporting legs and stainless steel cover for the motoreducer.

CURVED CONVEYOR BELTS

These conveyor belts are used where there is the need to change the direction of the product transported.
They can be a rubber belt conveyor or a shutter conveyor.

Spare Parts

Remote Assistance

Customer Service

IMBAL SERVICE

Installation and start-up of machines and plants.
Training center for Imbal technicians, branches, dealers and directly from customers. Revisions, upgrades, repairs, maintenance.
Troubleshooting and remote diagnostics.
Software upgrade

SPARE PARTS OF
FLOW WRAPPER
®MADE IN ITALY

Original IMBAL spare parts and custom spare parts kit on the machine model.

Support for the identification of the spare part. Offices of the DHL, UPS and GLS resident carriers within the Imbal spare parts warehouse and multiple daily withdrawals.

Optimized timing of evasion thanks to the worldwide distribution network with delocalized and automatic warehouses

Imbal Stock Srl

30-YEARS OF EXPERIENCE
Imbal stock is the Group's business sector specialized in packaging machines. Since 1994 designs, manufactures and markets a complete range of technologies and solutions aimed at food, cosmetic and medical packaging sectors. A few years specialized in horizontal flow wrapper

“

Our machines will help you start and expand your business.

We are committed to providing only the best solutions.

Via S. Fiorano, 55/A | 20852 Villasanta - (MB) |
P.IVA 04728080963 | Tel. +39 039 2847931 |
info@imbalstock.it